PCT/EB04/01539

PA 1198036

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

July 22, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: ***60/463,763***
FILING DATE: ***April 18, 2003***

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

E. Bornett

E. BORNETT
Certifying Officer

04-21-03

60463763 04/18/03

04/18/03 J1131 U.S. PTO

Please type a plus sign (+) inside this box → [+]

PTO/SB/16 (8-00)
Approved for use through10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

01033 U.S. PTO 60/463763

INVENTOR(S)		
Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)
Eduardo	Diaz Del Rio Perez	Madrid, Spain

☐ *Additional Inventors are being named on the ____ separately numbered sheets attached hereto*

TITLE OF THE INVENTION (280 characters max)

Explosion-Inhibiting Article of Manufacture

Direct all correspondence to: **CORRESPONDENCE ADDRESS**

☒ Customer Number 35172 →

OR *Type Customer Number here*

Place Customer Number Bar Code Label here
35172
PATENT TRADEMARK OFFICE

☐ Firm or Individual Name	David M. McConoughey				
Address	Stoll, Miskin & Badie				
Address	350 Fifth Ave Ste 4710				
City	New York	State	NY	ZIP	10118-4710
Country	US	Telephone	212.268.1530	Fax	212.268.1593

ENCLOSED APPLICATION PARTS *(check all that apply)*

☒ Specification *Number of Pages*	14 +15 claims	☐ CD(s), Number			
☒ Drawing(s) *Number of Sheets*	7	☐ Other (specify)			
☐ Application Data Sheet. See 37 CFR 1.76					

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT *(check one)*

☒	Applicant claims small entity status. See 37 CFR 1.27.	FILING FEE AMOUNT ($)
☒	A check or money order is enclosed to cover the filing fees #121	$80.00
☐	The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number	
☐	Payment by credit card. Form PTO-2038 is attached.	

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,

SIGNATURE David M. McConoughey

Date 04/18/2003

TYPED or PRINTED NAME David M. McConoughey

REGISTRATION NO. *(if appropriate)* 24786

Docket Number: 576391-2001

TELEPHONE 212.268.1530

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C.

60463763.041801

PTO/SB/17 (1-03)
Approved for use through 04/30/2003. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2003

Effective 01/01/2003. Patent fees are subject to annual revision.

☒ Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT ($) **$80.00**

Complete if Known	
Application Number	
Filing Date	
First Named Inventor	Eduardo Diaz Del Rio Perez
Examiner Name	
Group Art Unit	
Attorney Docket No.	576391-2001

METHOD OF PAYMENT (check all that apply)

☒ Check ☐ Credit card ☐ Money Order ☐ Other ☐ None

☐ Deposit Account: #121

Deposit Account Number

Deposit Account Name

The Commissioner is authorized to: (check all that apply)

☐ Charge fee(s) indicated below ☐ Credit any overpayments

☐ Charge any additional fee(s) during the pendency of this application

☐ Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code	Large Entity Fee ($)	Small Entity Fee Code	Small Entity Fee ($)	Fee Description	Fee Paid
1001	750	2001	375	Utility filing fee	
1002	330	2002	165	Design filing	
1003	520	2003	260	Plant filing fee	
1004	750	2004	375	Reissue filing	
1005	160	2005	80	Provisional filing fee	80.00

SUBTOTAL (1) ($) $80.00

2. EXTRA CLAIM FEES FOR UTILITY AND

	Extra Claims			Fee from below	Fee Paid
Total Claims		-20** =	0	X =	0.00
Independent Claims		- 3** =	0	X =	0.00
Multiple Dependent				=	

Large Entity Fee Code	Large Entity Fee ($)	Small Entity Fee Code	Small Entity Fee ($)	Fee Description
1202	18	2202	9	Claims in excess of 20
1201	84	2201	42	Independent claims in excess of 3
1203	280	2203	140	Multiple dependent claim, if not paid
1204	84	2204	42	** Reissue independent claims over original patent
1205	18	2205	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) ($) $0.00

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code	Large Entity Fee ($)	Small Entity Fee Code	Small Entity Fee ($)	Fee Description	Fee Paid
1051	130	2051	65	Surcharge - late filing fee or oath	
1052	50	2052	25	Surcharge - late provisional filing fee or cover sheet	
1053	130	1053	130	Non - English specification	
1812	2,520	1812	2,520	For filing a request for ex parte reexamination	
1804	920*	1804	920*	Requesting publication of SIR prior to Examiner action	
1805	1,840*	1805	1,840*	Requesting publication of SIR after Examiner action	
1251	110	2251	55	Extension for reply within first month	
1252	410	2252	205	Extension for reply within second month	
1253	930	2253	465	Extension for reply within third month	
1254	1,450	2254	725	Extension for reply within fourth month	
1255	1,970	2255	985	Extension for reply within fifth month	
1401	320	2401	160	Notice of Appeal	
1402	320	2402	160	Filing a brief in support of an appeal	
1403	280	2403	140	Request for oral hearing	
1451	1,510	1451	1,510	Petition to institute a public use proceeding	
1452	110	2452	55	Petition to revive - unavoidable	
1453	1,300	2453	650	Petition to revive - unintentional	
1501	1,300	2501	650	Utility issue fee (or reissue)	
1502	470	2502	235	Design issue fee	
1503	630	2503	315	Plant issue fee	
1460	130	1460	130	Petitions to the Commissioner	
1807	50	1807	50	Processing fee under 37 CFR § 1.17(q)	
1806	180	1806	180	Submission of Information Disclosure Statement	
8021	40	8021	40	Recording each patent assignment per property (times number of properties)	
1809	750	2809	375	Filing a submission after final rejection (37 CFR § 1.129(a))	
1810	750	2810	375	For each additional invention to be examined (37 CFR § 1.129(b))	
1801	750	2801	375	Request for Continued Examination (RCE)	
1802	900	1802	900	Request for expedited examination of a design application	

Other fee (specify) _____

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) ($)

SUBMITTED BY

Name (Print/Type)	David M. McConoughey	Registration No. (Attorney/Agent)	24786	Telephone	212.268.1530
Signature	David M. McConoughey			Date	April 18, 2003

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND

60463763 .041801

PROVISIONAL APPLICATION COVER SHEET
Additional Page

PTO/SB/16 (8-00)
Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a c ollection of information unless it displays a valid OMB control number.

Docket Number	576391-2001	Type a plus sign (+) inside this box →	

INVENTOR(S)/APPLICANT(S)		
Given Name (first and middle [if any])	Family or Surname	Residence (City and either State or Foreign Country)

Number ____ of ____

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

[redacted]

60463763 .041803

THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT:	EDUARDO DIAZ DEL RIO PEREZ
RESIDENCE:	C/ CALERUEGA NO. 3 28033 MADRID SPAIN
CITIZENSHIP:	SPAIN
TITLE OF THE INVENTION:	EXPLOSION-INHIBITING ARTICLES OF MANUFACTURE
SPECIFICATION:	14 PAGES
DRAWINGS:	7 SHEETS (FIGS. 1–16)
CLAIMS:	15 CLAIMS (6 INDEPENDENT)
ABSTRACT OF THE DISCLOSURE:	1 PAGE
ATTORNEY'S DOCKET NO.:	576391-2001

EXPRESS MAIL ER 087504485 US
Mailing Label Number
Date of Deposit: April 18, 2003
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" Service under 37 CFR 1.10 on the date indicated above and is addressed to

Commissioner of Patents and Trademarks
Washington, D.C. 20231
David M. McConoughey
(Name of person mailing paper or fee)

(Signature of person mailing paper or fee)

PROVISIONAL

PATENT APPLICATION

TITLE OF THE INVENTION

Explosion-inhibiting Articles of Manufacture.

CROSS-REFERENCES TO RELATED APPLICATIONS

Not applicable.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not applicable.

FIELD OF THE INVENTION

The present invention relates to articles of manufacture for inhibiting the explosion of flammable fluids contained in closed containment vessels and, in particular, for inhibiting boiling liquid, expanding vapor explosions.

BACKGROUND OF THE INVENTION

Previous approaches to inhibiting the explosion of flammable liquid vapors, especially to inhibiting boiling liquid expanding vapor explosions, have failed to take into account the settlement and the compaction of explosion mitigation devices during the service of those devices.

SUMMARY OF THE INVENTION

The present invention comprises an article of manufacture comprising an apertured sheet material, the sheet material being provided with at least one row of a plurality of polygonal

apertures, at least one of said polygonal apertures being irregular with respect to at least one adjacent polygonal aperture, and having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel,

ii. a heat conductivity of at least about 0.025 Cal/cm-sec.

Preferably, the inner peripheral length of at least one of the apertures is unequal to the inner peripheral length of at least one adjacent aperture. Further, the article preferably has a compressive yield of not more than about 10 percent.

In another embodiment, the foregoing sheet material is in the form of a cylindrical roll or bale

In a further embodiment, the foregoing sheet material is in the form of a spheroid

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a top plan view of a sheet material for use in the present invention.

Figure 2 is a side elevation view taken in transverse section along lines 2-2 in Figure 1 of a sheet material for use in the present invention.

Figure 3 is a top plan view of an apertured sheet material for use in the present invention.

Figure 4 is a side elevation view taken in transverse section along lines 4-4 in Figure 3 of an apertured sheet material for use in the present invention.

Figure 5 is a side elevation view taken in longitudinal section along lines 5-5 in Figure 3 of an apertured sheet material for use in the present invention.

Figure 6 is a top plan view of an expanded, apertured sheet material for use in the present invention.

Figure 7 is a side elevation view taken in transverse section along lines 7-7 in Figure 6 of an expanded, apertured sheet material for use in the present invention.

Figure 8 is a top plan view on an enlarged scale of portion of Figure 7 of an expanded, apertured sheet material for use in the present invention.

Figure 9 is a side elevation view taken in transverse section along lines 9-9 in Figure 8 of an expanded, apertured sheet material for use in the present invention.

Figure 10 is a top plan view of a waved, expanded, apertured sheet material for use in the present invention.

Figure 11 is a side elevation view taken in transverse section along lines 11-11 in Figure 10 of a waved, expanded, apertured sheet material for use in the present invention.

Figure 12 is a side elevation view taken in longitudinal section along lines 12-12 in Figure 10 of a waved, expanded, apertured sheet material for use in the present invention.

Figure 13 is a front perspective view of a cylindrical shape made in accordance with the present invention.

Figure 14 is a front elevation view of a cylindrical shape made in accordance with the present invention.

Figure 15 is a top plan view taken in horizontal section along lines 15-15 in Figure 14 of a cylindrical shape made in accordance with the present invention.

Figure 16 is a side elevation view of a spheroidal shape made in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention comprises, as an article of manufacture, an apertured sheet material, the sheet material being provided with at least one row of a plurality of polygonal apertures, at least one of said polygonal apertures being irregular with respect to at least one adjacent polygonal aperture, and having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel,

ii. a heat conductivity of at least about 0.025 Cal/cm-sec.

Preferably, the inner peripheral length of at least one of the apertures is unequal to the inner peripheral length of at least one adjacent aperture. Further, the article preferably has a compressive yield of not more than about 10 percent.

In this way, an apertured sheet material is provided that produces a configuration that is resistant to settling and to compaction. Such an article of manufacture is helpful in inhibiting a flammable fluid explosion in a closed containment vessel containing flammable fluid, particularly in inhibiting a boiling liquid, expanding vapor explosion (or "BLEVE".)

A sheet material for use in the present invention, and as illustrated in Figs. 1 & 2 by way of example, comprises a sheet 1 of heat-conductive material, preferably having the aforesaid physical properties. The sheet has a flat, generally planar configuration with a thickness from about 0.01 mm (1 micron) to about 0.1 mm (10 microns), desirably from about 0.03 mm (3 microns) to about 0.07 mm (7 microns) and preferably from about 0.04 mm (4 microns) to about 0.05 mm (5 microns).

The sheet material desirably has good heat conductivity in order to adequately dissipate heat in inhibiting the explosion of flammable fluids contained in closed containers, particularly

for inhibiting BLEVEs. The heat conductivity should be at least about 0.025 Cal/cm-sec, particularly for materials with a specific density of from about 2.8 g/cm^3 to about 19.5 g/cm^3, and preferably from about 0.025 to about 0.95 Cal/cm-sec, particularly for materials with a specific density of from about 2.8 g/cm^3 to about 19.5 g/cm^3

The heat conductivity is nominally about 2.36 Watt/cm-deg (Kelvin) at 273 T.K. (degrees Kelvin) (for Aluminum)-The following can be used as candidate alloy or raw materials depending on the application:

Silver 4.28 Watt/cm-deg (Kelvin) at 273 T.K.,
Gold 3.2018 Watt/cm-deg (Kelvin) at 273 T.K.,
Copper 4.1 Watt/cm-deg (Kelvin) at 273 T.K.,
Stainless Steel 0.835 Watt/cm-deg (Kelvin) at 273 T.K., and
polymeric material

for a material with a density, for example, of 2.7 g/cm^3 (Al); 10.5 g/cm^3 (Silver), 19.3 g/cm^3 (Gold), 8.92 g/cm^3 (Copper), 7.86 g/cm^3 (Stainless Steel) or 0.9 to 1.5 g/cm^3 (polymeric material.

The sheet material is desirably relatively chemically inert to the contents of the closed container for the service life of the container and/or the residence period of the contents in the container. Materials may be metals and metallic alloys, such as aluminum, magnesium, copper, gold, silver or stainless steel, or nonmetallics, such as polymeric or plastic materials.

A slit sheet material for use in the present invention, and as is illustrated in Figs. 3, 4 & 5 by way of example, comprises a sheet material 10 having a plurality of parallel lines P (Fig. 3) of elongated rectangular apertures 12, preferably slots. Each rectangular aperture 12, and each line P of rectangular apertures 12, extends parallel to the longitudinal central axis of the sheet. Each

rectangular aperture 12 in a line P of rectangular apertures 12 is spaced from the rectangular aperture 12 preceding it and the rectangular aperture 12 following it by an intermediate web 14 of solid, imperforate sheet material. In other words, in proceeding longitudinally along a line P of rectangular apertures 12, there is a rectangular aperture 12 followed by an intermediate web 14, followed by a rectangular aperture 12 followed by an intermediate web 14, et cetera.

In forming a sheet with polygonal apertures, the intermediate webs 14 of adjacent lines of rectangular apertures are offset with respect to each other so that in proceeding transversely across the sheet along a line T that is perpendicular to the longitudinal central axis of the sheet and that passes through an intermediate web 14 of an adjacent longitudinal line P of rectangular apertures 12,

a. the transverse line T will pass across a rectangular aperture 12 of the next adjacent longitudinal line P of rectangular apertures 12,
b. then through an intermediate web 14 of the next adjacent longitudinal line P of rectangular apertures 12,
c. then across a rectangular aperture 12 of the next adjacent longitudinal line of rectangular apertures, et cetera.

In this way, the longitudinally extending rectangular apertures 12 alternate with intermediate webs 14 transversely across the sheet 10.

Preferably, the length of each longitudinally extending rectangular aperture 12 in proceeding along a transverse line T of rectangular apertures 12 should be different from the length of the rectangular aperture 12 preceding it and the length of the rectangular aperture 12 following it. In other words, the length of each longitudinally extending rectangular aperture 12 is preferably different from the length of the next adjacent longitudinally extending rectangular

aperture 12 in a transverse line T across the width of the sheet. Further, with respect to each rectangular aperture 12, the length of each of the four most adjacent rectangular apertures 12 in the two most adjacent longitudinal lines P of rectangular apertures 12 should preferably also be different from that of the rectangular aperture 12.

The lengths of the respective longitudinally extending rectangular apertures 12 in a transverse line T across the width of the sheet may be random with respect to each other. Alternatively, the lengths of each respective longitudinally extending rectangular aperture 12 may increase progressively in length in a transverse line T across the width of the sheet or decrease in length. In one alternative embodiment, the lengths of each respective longitudinally extending rectangular aperture 12 increase progressively in length in a transverse line T across the width of the sheet and the lengths of each respective longitudinally extending rectangular aperture 12 in the next adjacent transverse line T decreases progressively in length across the width of the sheet.

The length of the apertures 12 is nominally from about 10 to about 15 mm., desirably from about 12 mm. to about 15 mm., and preferably, from about 13 mm. to about 15 mm. In this way, an aperture of 10 mm. might be followed by one of 10.033 mm, followed by one of 10.06 mm. The width of each rectangular aperture, or slot, may be from about .02 mm. to .06 mm, desirably from about .03 mm. to about .05 mm., and, preferably, from about .04 mm. to about .05 mm. The spacing between the rows of apertures may be varied based on the properties of the material used for the sheet.

The intermediate web between apertures, in turn, is from about 2.5 mm to about 4.5 mm. In this way, an intermediate web of 3 mm. might be followed by one of 3.5 mm, followed by one of 4 mm.

In this way, irregularity is induced in the expanded apertured sheet that produces configurational resistance to settling and compaction.

A slit sheet material for use in the present invention, and as illustrated in Figs. 6 through 9 by way of example, is converted into an expanded, apertured (or fenestrated) sheet material 20 of the present invention that is provided with a plurality of many-sided, or polygonal apertures 22, such as, for example and as illustrated, hexagonal apertures. At least one polygonal aperture is irregular with respect to at least one adjacent polygonal aperture.

For example, the sum of the lengths of the inner edges of the sides of a polygonal aperture 22, for example lengths 22a, 22b, 22c, 22d, 22e, and 22f in Fig. 9, determine an inner peripheral length of a polygonal aperture 22. The inner peripheral length of each polygonal aperture 22 in proceeding along a transverse line T of polygonal apertures 22 should be different from the inner peripheral length of the polygonal aperture 22 preceding it and the inner peripheral length of the polygonal aperture 22 following it. In other words, the inner peripheral length of each polygonal aperture 22 is different from the inner peripheral length of the next adjacent polygonal aperture 22 in a transverse line across the width of the sheet. Further with respect to each polygonal aperture 22, the inner peripheral length of each of the four most adjacent polygonal apertures 22 in the two most adjacent longitudinal lines of polygonal apertures 22 should preferably also be different from that polygonal aperture 22.

The inner peripheral lengths of the respective polygonal apertures 22 in a transverse line T across the width of the sheet may be random with respect to each other. Alternatively, the inner peripheral lengths of each respective polygonal aperture 22 may increase progressively in inner peripheral length in a transverse line T across the width of the sheet or decrease. In one alternative embodiment, the inner peripheral lengths of each respective polygonal aperture 22

increase progressively in length in a transverse line T across the width of the sheet and the inner peripheral lengths of each respective polygonal aperture 22 in the next adjacent transverse line T decrease progressively in length across the width of the sheet.

The term "irregular" as it is used herein in the context of the inner peripheral length of at least one of said apertures being unequal to the inner peripheral length of at least one adjacent aperture means that the numerical value of the inequality of one inner peripheral length with respect to the other inner peripheral length is greater than the variation in inner peripheral length produce by manufacturing variation or manufacturing tolerance. In other words, the inequality is intentional rather than random or inherent manufacturing variation.

While the irregularity of at least one polygonal aperture with respect to at least one adjacent polygonal aperture has been described in terms of the inner peripheral length of at least one of said apertures being unequal to the inner peripheral length of at least one adjacent aperture, it should be understood that irregularity can also be produced in other ways, such as having a different number of sides on the polygon (such as a pentagon or a heptagon versus a hexagon) or the length of a side of a polygonal aperture being different from the corresponding side of an adjacent polygonal aperture (i.e., greater than manufacturing variation or tolerance as previously stated)or the angle between two adjacent sides of a polygonal aperture being different from the corresponding angle between the corresponding two sides of an adjacent polygonal aperture. For example, the respective lengths of the side edges of the apertures may not all be equal, i.e., at least one side may not be the same length as any of the other sides, thereby providing an aperture with a configuration such as an irregular polygon.)

In this way, when multiple expanded, apertured sheets are placed on top of each other, they are unable to align polygonal apertures and nest into each other, settling and thereby reducing the effective thickness of the multiple sheets 20.

The expanded, apertured (or fenestrated) sheet material 20 of the present invention desirably has a compression yield, or resistance to compaction (i.e., permanent deformation under compressive load), of not more than 10 percent. Ideally, however, there is essentially no compressive yield in service.

The expanded, apertured sheet material 20 is formed by tensioning slotted sheet material 10 over large wheel of a varying diameter positioned in such a way as to regulate the spreading of the sheet material to an additional width 50% to 100 % that of the raw sheet material width so as to ensure the resulting openings form a plurality of polygonal apertures 22 as aforesaid.

The expanded, apertured sheet material 20 desirably has an effective surface area per unit volume from at least about 2,000 times the contact surface of flammable liquid/ vapors and gases contained in closed containers, particularly for inhibiting boiling liquid, expanding vapor explosions, and preferably from at least about 3,000 times the contact surface of flammable liquid/ vapors and gases contained in closed containers. The term "contact surface" refers to the surface area of the containment vessel that is in contact with the gaseous, aerosol or vapor phase of the flammable fluid that is contained in the containment vessel. Normally the flammable fluids (liquid, vapor, aerosol or gas) are in contact with the surface areas of the walls of the container containing the flammable fluid. The insertion of the finished expanded, apertured sheet material increases the surface area of contact with the flammable fluid by at least about 2,000 times this contact surface area, preferably at least about 3,000 times this contact surface area. This ratio is significant and to compromise this proportion of contact relative to the specific fluid

in question is to risk a BLEVE. This area varies in relation to the heat conductivity and compressive yield strength of the material used.

In one embodiment, expanded, apertured sheet material 20 for use in the present invention, and as is illustrated in Fig. 16 by way of example, may be formed into a shape that comprises a body 100 with a generally spheroidal external configuration or shape.

The internal configuration of the generally spheroidal body 100 comprises at least one strip of the aforesaid expanded, expanded sheet material that is folded and/or crimped and cupped to form said spheroidal shape. The generally spheroidal shape may be formed using a section of expanded, apertured sheet material of a size proportional to about 20% of the width of the expanded, apertured sheet material.

The outer spherical periphery of the spheroid 100 encloses a volume. The surface area of the material contained within this periphery, i.e., inside the spheroid, subject to the application design requirement, is at least about 1.5 square centimeters per cubic centimeter of said volume or larger as required, The surface area of the material should be at least about 2,000 times the contact surface of flammable fluid contained in the enclosing container of those flammable fluid, particularly for inhibiting BLEVEs.

The spheroid 100 desirably has a compression yield, or resistance to compaction (i.e., permanent deformation under compressive load), of not more than 10 percent. Ideally, however, there is essentially no compressive yield in service.

The structural strength of the final product can also be modified by using a different heat hardness in the sheet material.

In an alternative embodiment of the present invention, expanded, apertured sheet material 20 for use in the present invention, and as illustrated in Figs. 10 through 12 by way of example,

is provided with a transverse undulating, or sinusoidal, wave 42 formed in it and the waved, expanded, apertured sheet material 40, as illustrated in Figs. 13 through 15 by way of example, is helically wound into a cylindrical shape 200, such as a cylindrical bale. The cylindrical shape 200 is generally circular in transverse section (Fig. 14) and generally rectangular in longitudinal section (Fig. 15.) In a further form of this cylindrical embodiment, a flat expanded, apertured sheet material may be wound into the cylindrical form. In a still further form (Figs. 13-15) of this cylindrical embodiment, a sheet of flat expanded, apertured sheet material 202 and a sheet of waved, expanded, apertured sheet material 204 may be wound into the cylindrical form, thereby forming alternate layers of flat and waved expanded, apertured sheet material in the cylindrical shape.

Because of the wave 42 formed in the sheet material 40, with the sheet material 40 helically wound, the wave 42 causes an increase in the effective diameter of the cylinder 200. In this way, the effective surface area contained within a given outer periphery of the cylinder 200 is increased. This provides large included volume cylinders 200 with low mass and high internal effective area.

The cylinder 200 desirably has a compression yield, or resistance to compaction (i.e., permanent deformation under compressive load), of not more than 10 percent. Ideally, however, there is essentially no compressive yield in service.

The imperforate starting sheet material 1 may be supplied as a continuous, non-perforated web of sheet material. Then, rectangular apertures 12, or slots, are formed in the continuous web in the aforesaid configuration, such as by slitting. Then, the slotted web 10 may be expanded transversely by tensioning the sheet material 10 transversely, such as over a wheel positioned in such a way as to regulate the spreading of the sheet material to an additional width 50% to 100 %

that of the raw sheet material width so as to ensure the resulting openings form a plurality of polygonal apertures 22 of irregularity as aforesaid. Adjusting the position and tension of the expanding wheel on the production machine does this. By doing this, the result is the ability to have the walls of the finished honeycomb pattern more or less more erect, thereby increasing the compressive strength of the finished expanded, apertured sheet material 20.

Optionally, the expanded, apertured web 20 may have a sinusoidal transverse wave 42 formed in it. The form of the wave 42 is introduced or impressed into the lengths of the sheet material 20 as a series of transverse kinks or waves 42 along the length of the web that looks like waves when the finished product is spooled.

Cylindrical shapes 200 may be formed by winding the aforesaid expanded, apertured sheet material.

Spheroid shapes 100 may be made by feeding the sheet material 20 provided with a plurality of rows of a plurality of parallel apertures 22, the longitudinal central of each being parallel to the longitudinal central axis of the sheet, into a machine using a mechanical device comprising two semi-circular rimmed sections with the working sections opposing each other. One is a stationary semi circular die of a variable radius with a concave working edge. The other is a rotating 360 degree circular die with a concave working edge with a friction surface. The rotation of the circular die against the fixed die forms the sheet material into a tube shape. As the sheet material is drawn through the aperture formed by the interfacing of the circular die rotating against the fixed die, the rotating die grabs a length of sheet material, determined by the material volume required for the diameters of the two semi-circular rimmed sections of the dies. and tumbles the expanded sheet material into a generally spheroidal shape.

The expanded, apertured sheet material of the present invention may be used in the following applications:

1. Cylinders of expanded, apertured sheet material (netting) loaded into large closed vessels, tanks, cans, drums, bulk carriers, fuel tanks of all description, pipe lines, piping, tubing, construction, insulation and in other applications where flammable fluids, such as, flammable liquids, vapors, aerosols or gases are used, stored, or transported;
2. Spheroids of expanded, apertured sheet material loaded as spheroids into small closed vessels, gas cylinders, gas bottles, fuel tanks of all description, bulk carriers, construction, insulation and in other applications where flammable fluids, such as flammable liquids, vapors, aerosols or gases are, used, stored or transported;

3. Solar panels; 4. Insulation; 5. Construction material; 6. Sound proofing; 7. Cooling elements for computer equipment; 8. Filters; 9. Heat Exchangers; 10. Fire-proof cloth; 11. Fire-retardants; 12. Aircraft; 13. Refineries; 14. Pipelines; 15. Gasoline stations; 16. Gas tanks and gas cylinders; 17. Gas vehicles; and 18. Bulk fluid carriers and vessels.

CLAIMS

I claim:

1. An explosion-inhibiting article of manufacture comprising an apertured sheet material, said sheet material

a. being provided with at least one row of a plurality of polygonal apertures, at least one of said polygonal apertures being irregular with respect to at least one adjacent polygonal aperture,

and

b. having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel, and

ii. a heat conductivity of at least about 0.025 Cal/cm-sec.

2. An explosion-inhibiting article of manufacture in accordance with claim 1, wherein the inner peripheral length of at least one of said apertures is unequal to the inner peripheral length of at least one adjacent aperture.

3. An explosion-inhibiting article of manufacture in accordance with claim 1, wherein the material has a density from about 2.8 g/cm^3 to about 19.5 g/cm^3.

4. An explosion-inhibiting article of manufacture in accordance with claim 1, wherein said article has a compressive yield of not more than about 10 percent.

5. An explosion-inhibiting article of manufacture having a generally spheroidal shape and comprising an apertured sheet material, said sheet material

a. being provided with at least one row of a plurality of polygonal apertures, at least one of said polygonal apertures being irregular with respect to at least one adjacent polygonal aperture,

and

b. having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel, and

ii. a heat conductivity of at least about 0.025 Cal/cm-sec.

6. An explosion-inhibiting article of manufacture in accordance with claim 5, wherein the inner peripheral length of at least one of said apertures is unequal to the inner peripheral length of at least one adjacent aperture.

7. An explosion-inhibiting article of manufacture in accordance with claim 5, wherein the material has a density from about 2.8 g/cm^3 to about 19.5 g/cm^3.

8. An explosion-inhibiting article of manufacture in accordance with claim 5, wherein said article has a compressive yield of not more than about 10 percent.

9. An explosion-inhibiting article of manufacture having a generally cylindrical shape and comprising an apertured sheet material, said sheet material

a. being provided with at least one row of a plurality of polygonal apertures, at least one of said polygonal apertures being irregular with respect to at least one adjacent polygonal aperture,

and

b. having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel, and

ii. a heat conductivity of at least about 0.025 Cal/cm-sec.

10. An explosion-inhibiting article of manufacture in accordance with claim 9, wherein the inner peripheral length of at least one of said apertures is unequal to the inner peripheral length of at least one adjacent aperture.

11. An explosion-inhibiting article of manufacture in accordance with claim 9, wherein the material has a density from about 2.8 g/cm^3 to about 19.5 g/cm^3.

12. An explosion-inhibiting article of manufacture in accordance with claim 9, wherein said article has a compressive yield of not more than about 10 percent.

13. An explosion-inhibiting article of manufacture comprising an apertured sheet material, said sheet material

a. being provided with at least one row of a plurality of polygonal apertures, and

b. having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel, and

ii. a heat conductivity of at least about 0.025 Cal/cm-sec,

said article having a compressive yield of not more than about 10 percent.

14. An explosion-inhibiting article of manufacture having a generally spheroidal shape and comprising an apertured sheet material, said sheet material

a. being provided with at least one row of a plurality of polygonal apertures, and

b. having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel, and

ii. a heat conductivity of at least about 0.025 Cal/cm-sec,

said article having a compressive yield of not more than about 10 percent.

15. An explosion-inhibiting article of manufacture having a generally cylindrical shape and comprising an apertured sheet material, said sheet material

a. being provided with at least one row of a plurality of polygonal apertures, and

b. having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel, and

ii. a heat conductivity of at least about 0.025 Cal/cm-sec,

said article having a compressive yield of not more than about 10 percent.

ABSTRACT OF THE DISCLOSURE

Articles of manufacture formed of an apertured sheet material, the sheet material being provided with at least one row of a plurality of polygonal apertures, at least one of said polygonal apertures being irregular with respect to at least one adjacent polygonal aperture, and having physical characteristics comprising

i. a surface area per unit volume of application of at least about 2,000 times the contact surface of flammable fluids contained in a containing vessel,

ii. a heat conductivity of at least about 0.025 Cal/cm-sec.

Preferably, the inner peripheral length of at least one of said apertures is unequal to the inner peripheral length of at least one adjacent aperture. Further, the article preferably has a compressive yield of not more than about 10 percent.

60463763 .041803

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (02-01)
Approved for use through 10/31/2002. OMB 0651-0035
U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY OR AUTHORIZATION OF AGENT

Application Number	
Filing Date	
First Named Inventor	Eduardo Diaz Del Rio Perez
Group Art Unit	
Examiner Name	
Attorney Docket Number	576391-2001

I hereby appoint:

☒ Practitioners at Customer Number 35172 →

OR

☐ Practitioner(s) named below:

Place Customer Number Bar Code Label here

35172

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioner(s) at Customer Number. → Place Customer Number Bar Code Label here

OR

☐ Firm *or* Individual Name					
Address					
Address					
City		State		Zip	
Country					
Telephone		Fax			

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).

SIGNATURE of Applicant or Assignee of Record

Name	Eduardo Diaz Del Rio Perez
Signature	
Date	April 18, 2003

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple

☐ *Total of _____ forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the

[redacted]

PTO/SB/01 (10-01)
Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

☒ Declaration Submitted with Initial Filing OR ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16(e))

Attorney Docket Number	576391-2001
First Named Inventor	Eduardo Diaz Del Rio Perez
COMPLETE IF KNOWN	
Application Number	/
Filing Date	
Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Explosion-Inhibiting Articles of Manufacture

(Title of the Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) ☐ as United States Application Number or PCT International Application Number ☐ and was amended on (MM/DD/YYYY) ☐ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above:

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application		Foreign Filing Date	Priority	Certified Copy Attached? YES	NO
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐
			☐	☐	☐

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

60463763.041803

PTO/SB/01 (10-01)
Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to: ☒ Customer Number or Bar Code Label 35172 OR ☐ Correspondence address below

PATENT TRADEMARK OFFICE

Name	David M. McConoughey		
Address	Stoll, Miskin & Badie, 350 Fifth Ave Ste 4710		
City	New York	State NY	ZIP 10118-4710
Country	US	Telephone 212.268.1530	Fax 212.268.1530

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR : ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any]) Eduardo		Family Name or Surname Diaz Del Rio Perez	
Inventor's Signature			Date April 18, 2003
Residence: City Madrid	State -	Country Spain	Citizenship Spain
Mailing Address C/Calcruega No. 3			
City 28033 Madrid	State	ZIP	Country Spain

NAME OF SECOND INVENTOR: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])		Family Name or Surname	
Inventor's Signature			Date
Residence: City	State	Country	Citizenship
Mailing Address			
City	State	ZIP	Country

☐ Additional inventors are being named on _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.

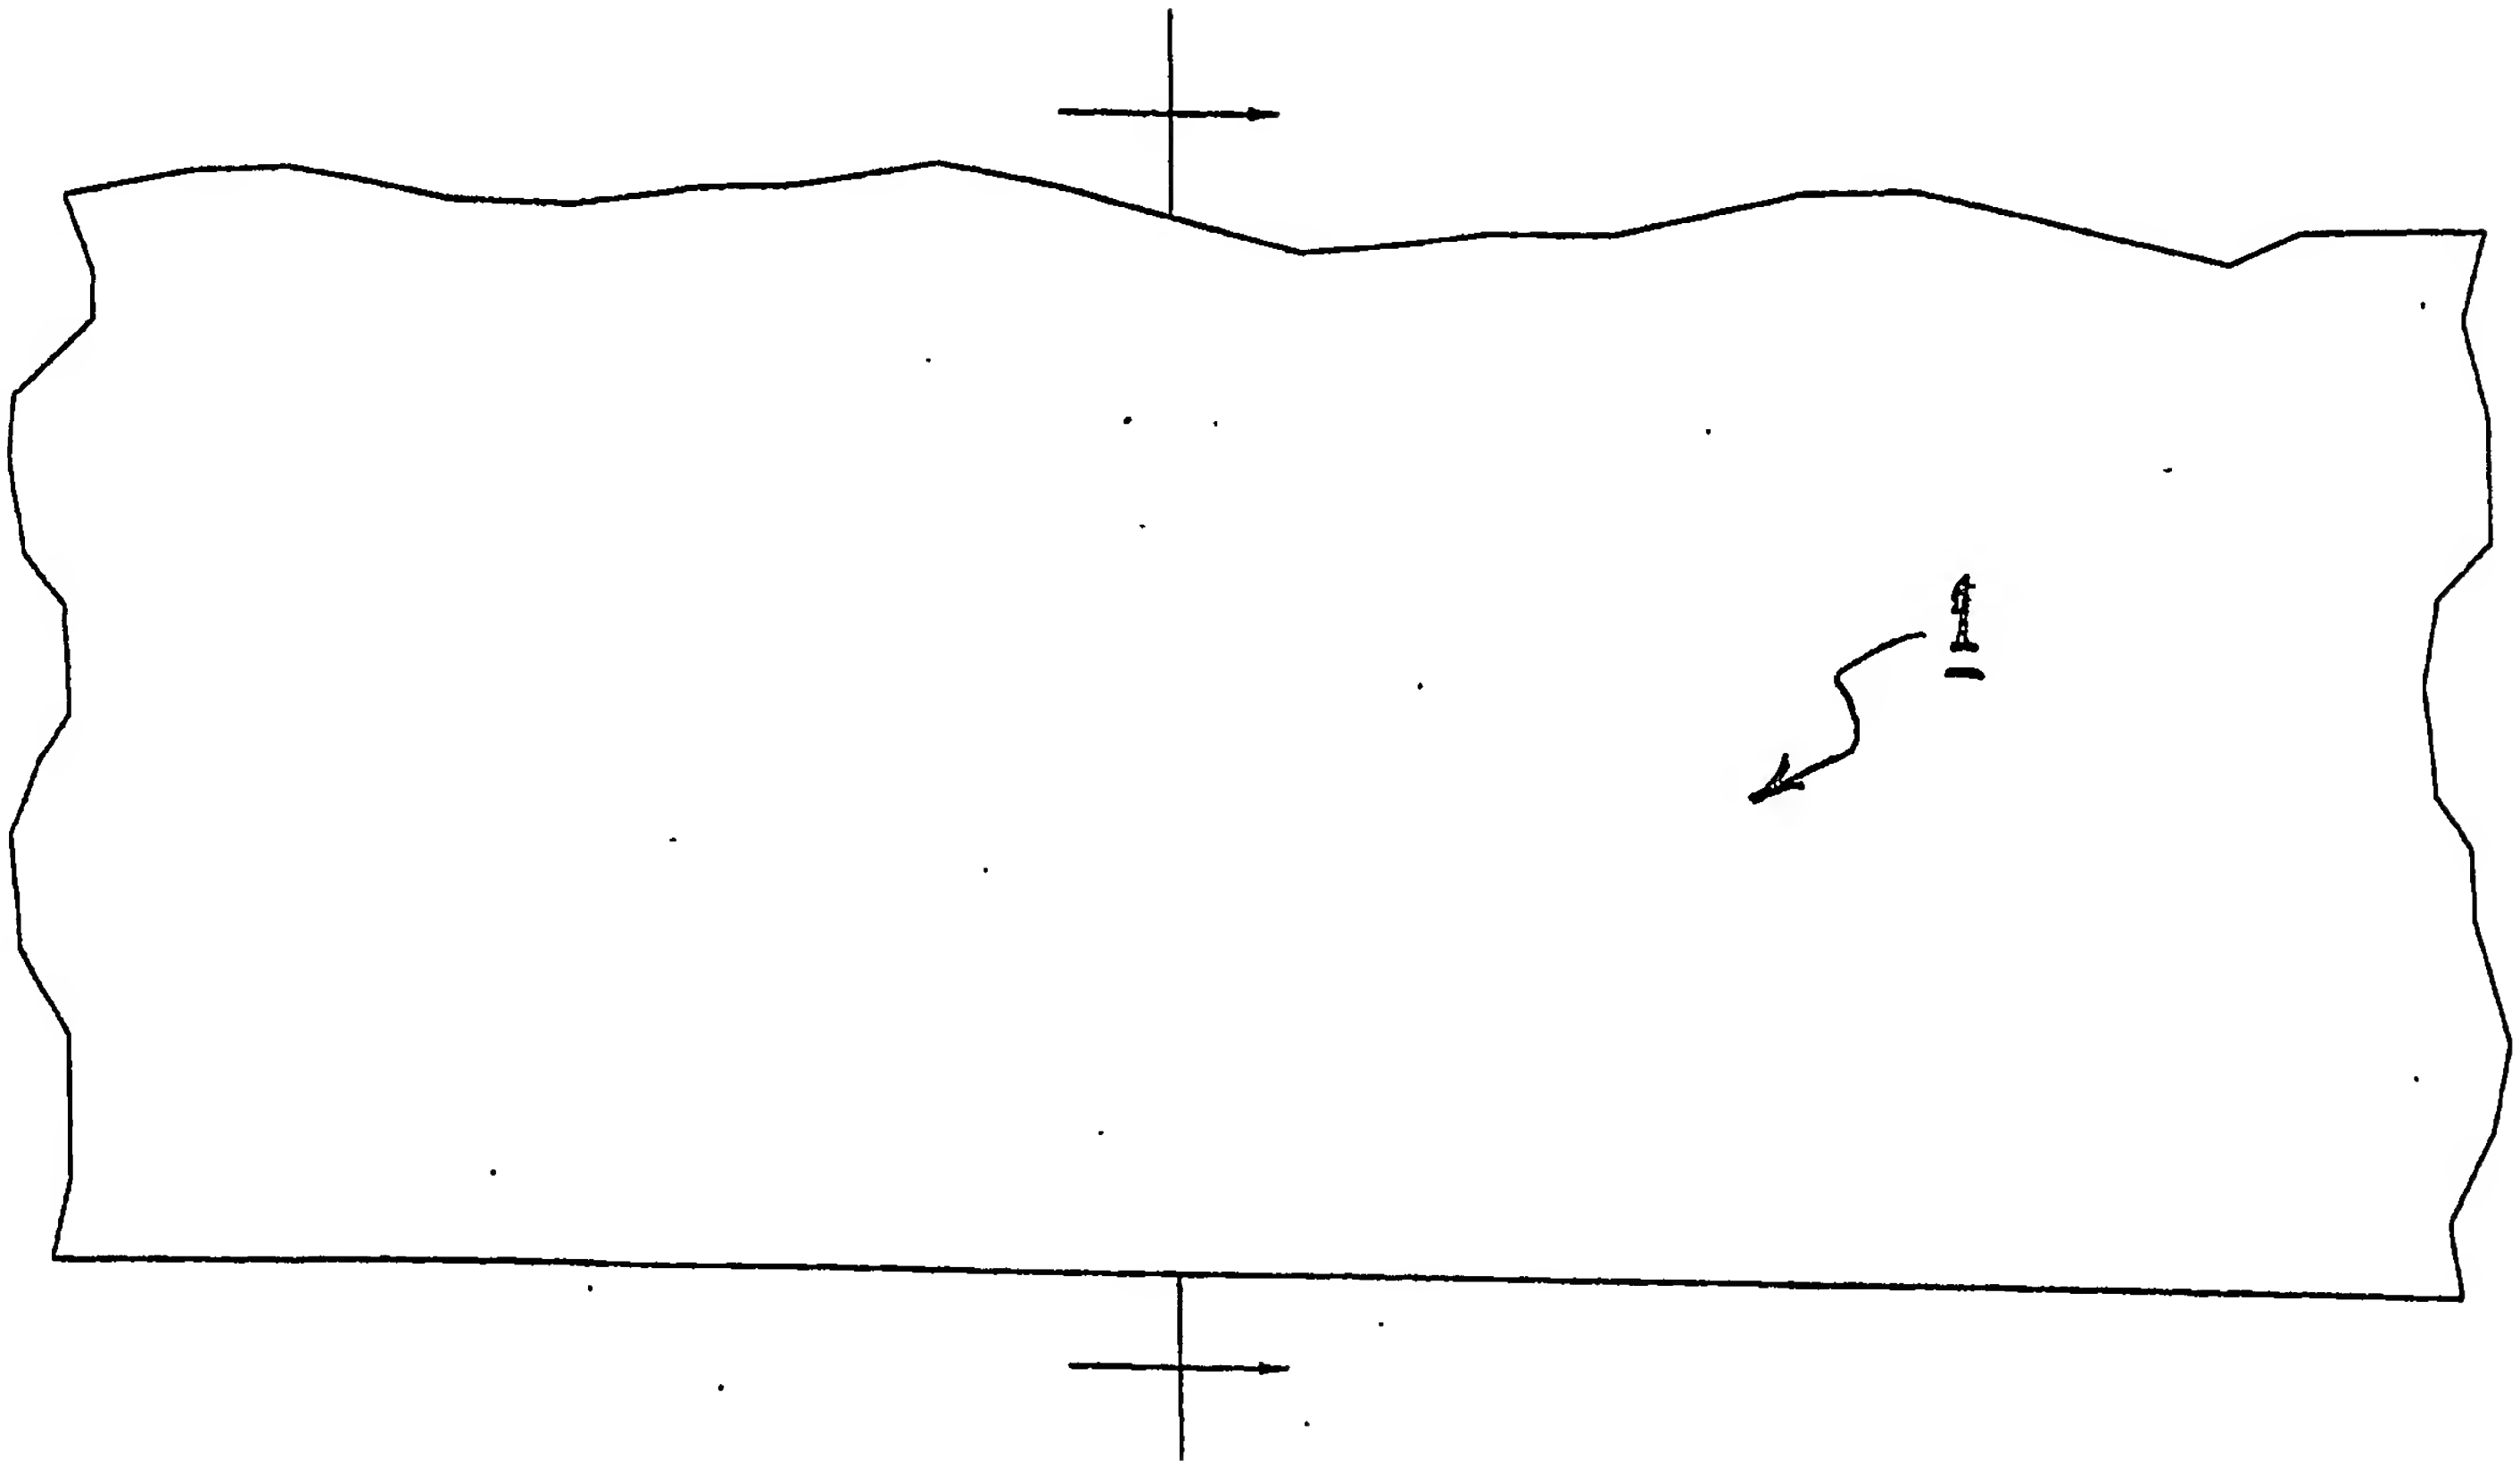

FIG. 1

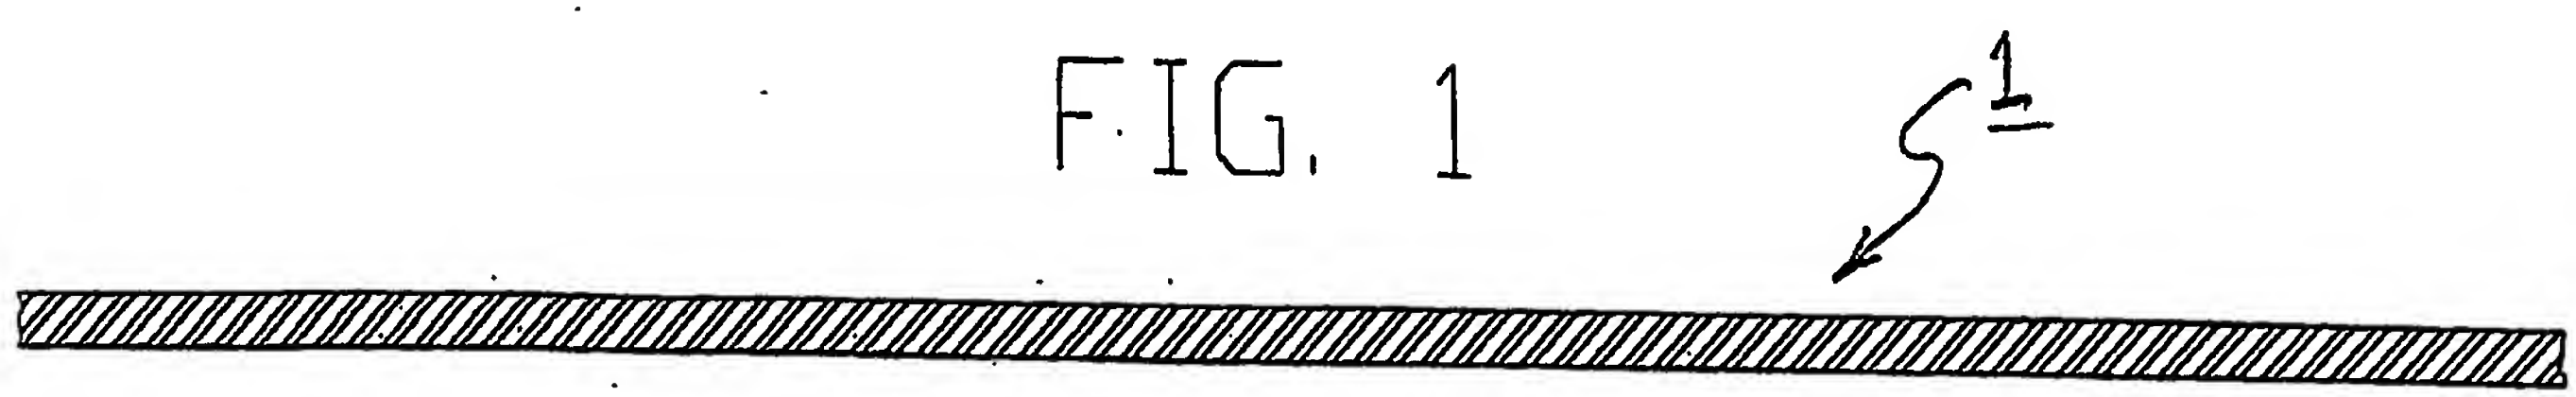

FIG. 2

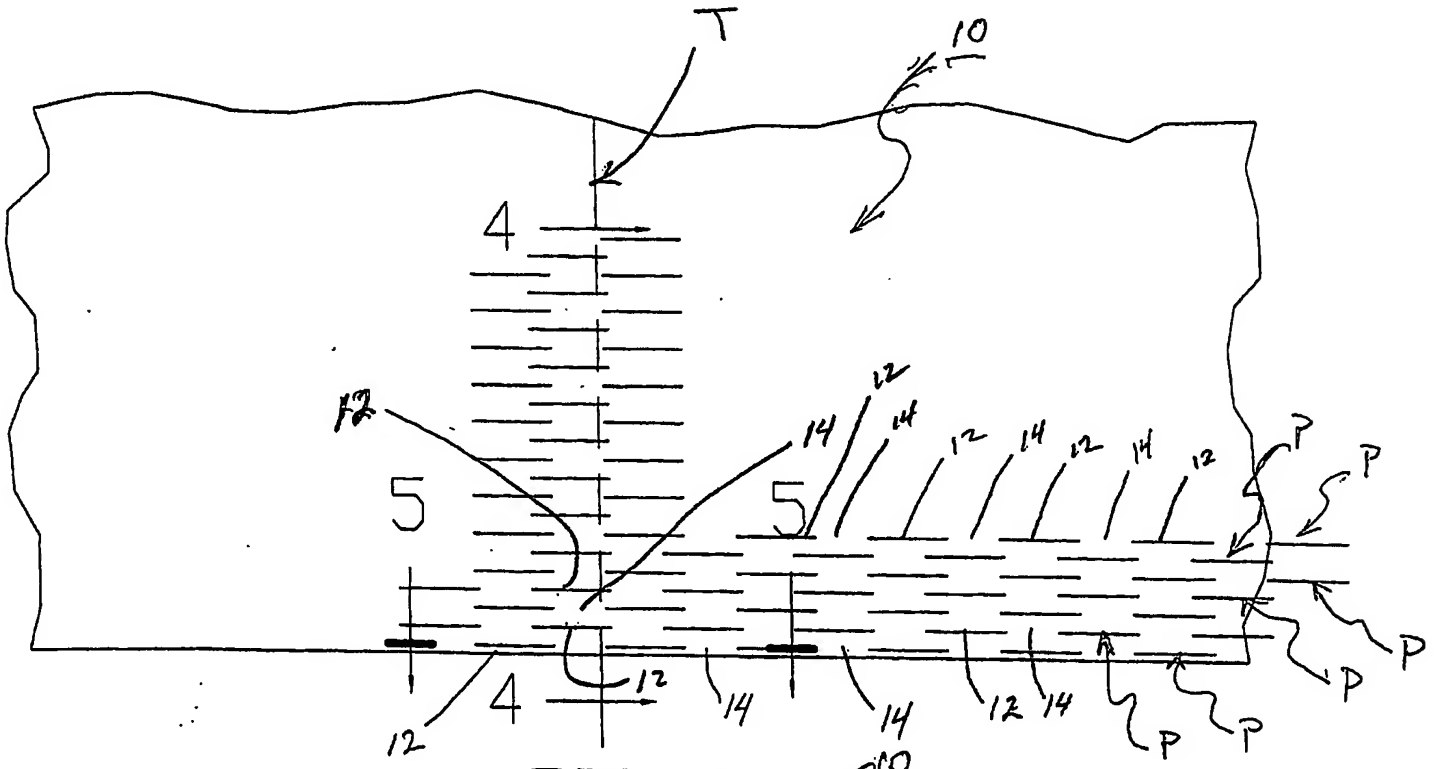

FIG. 3

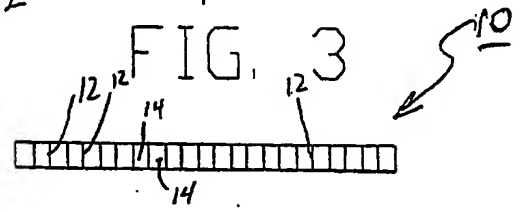

FIG. 4

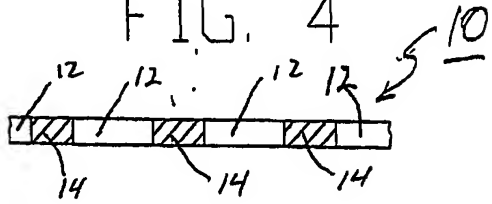

FIG. 5

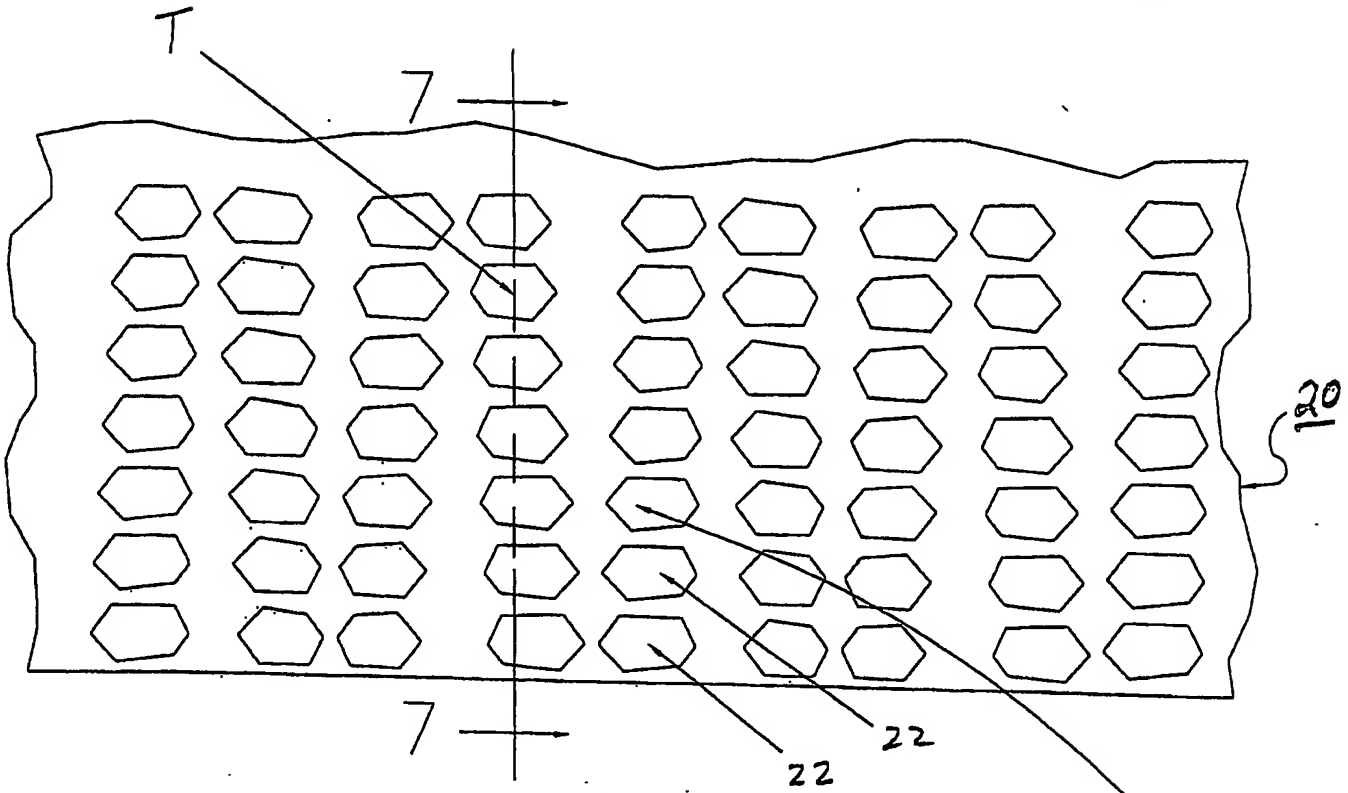

FIG. 6

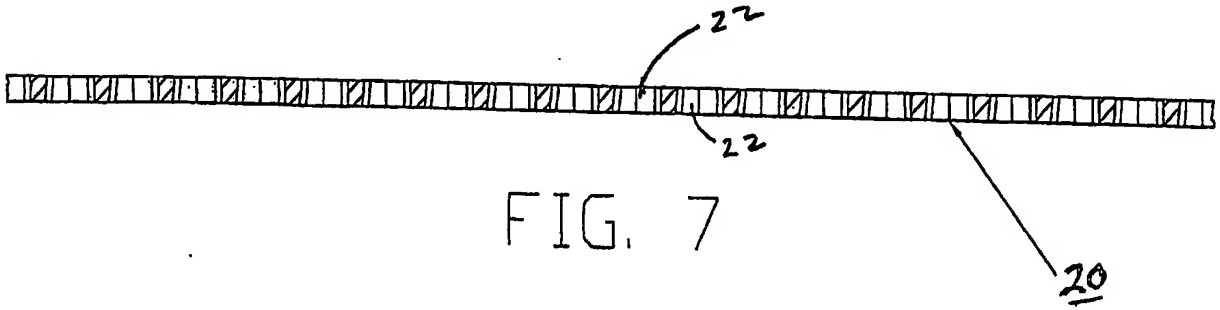

FIG. 7

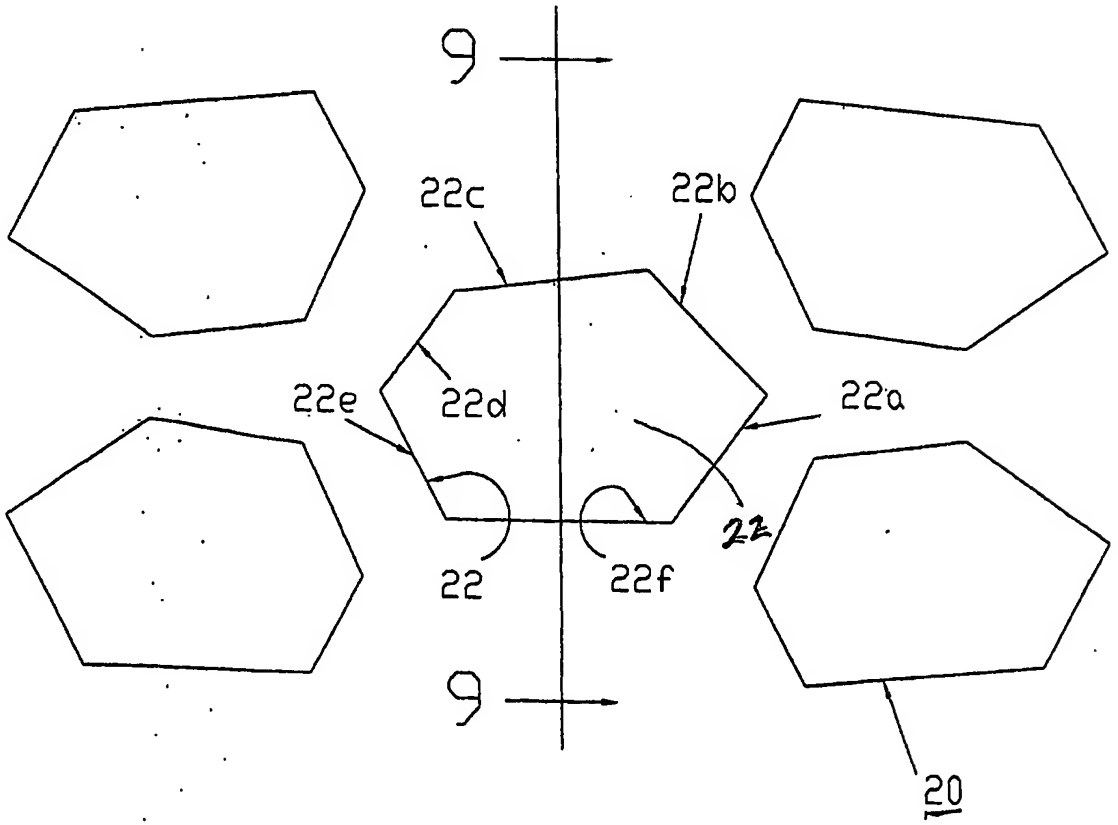

FIG. 8

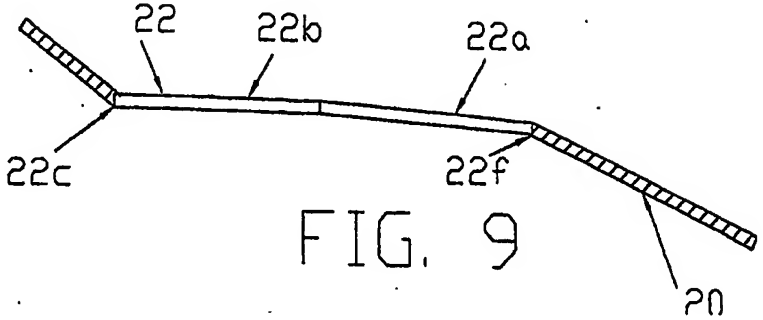

FIG. 9

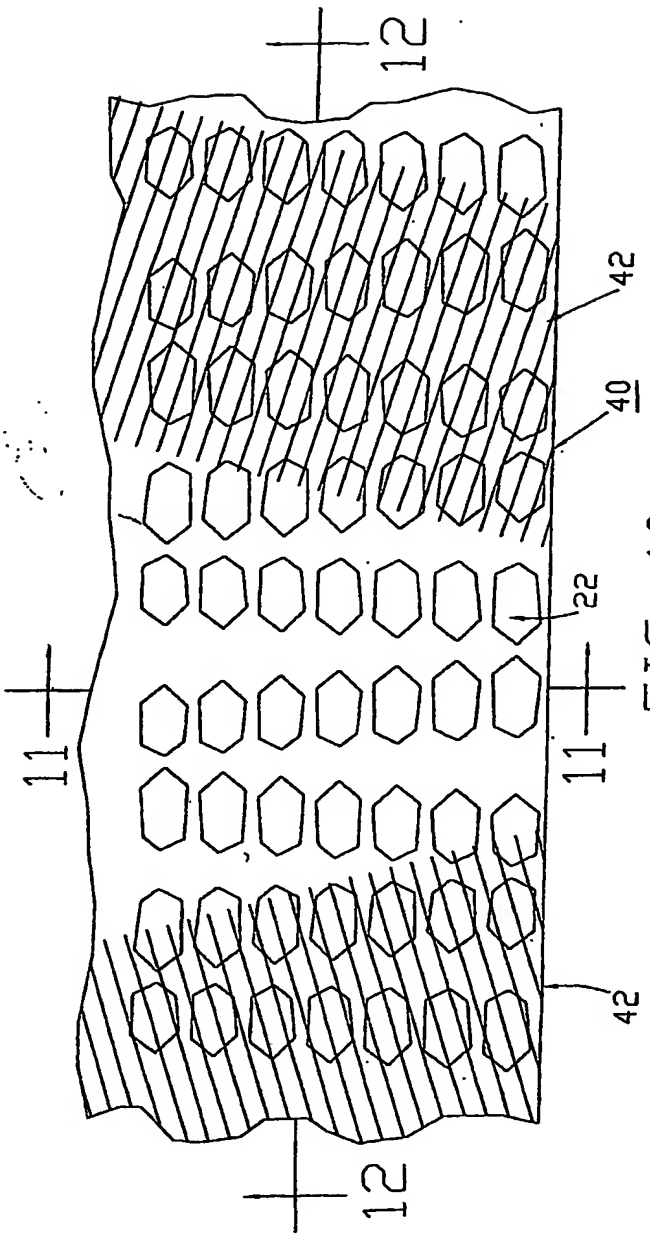

FIG. 10

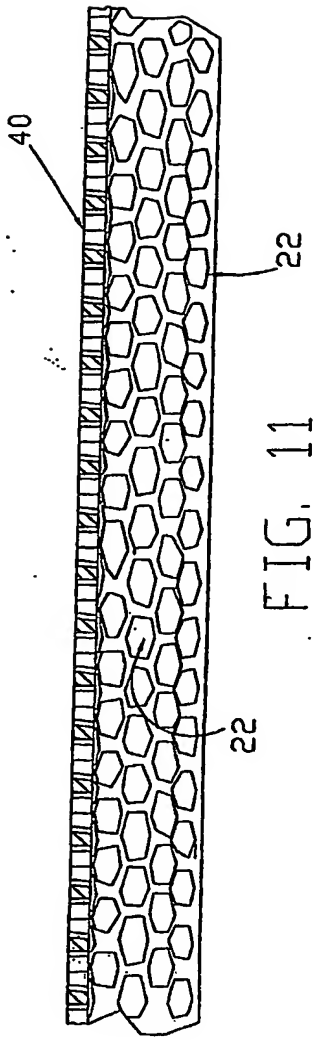

FIG. 11

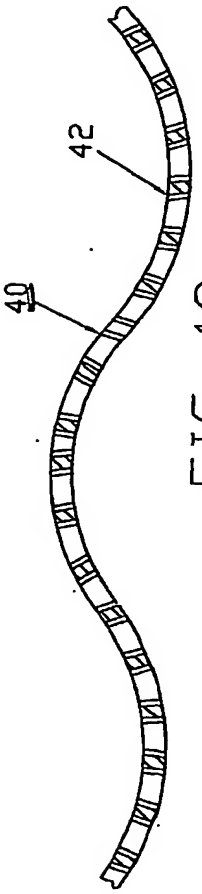

FIG. 12

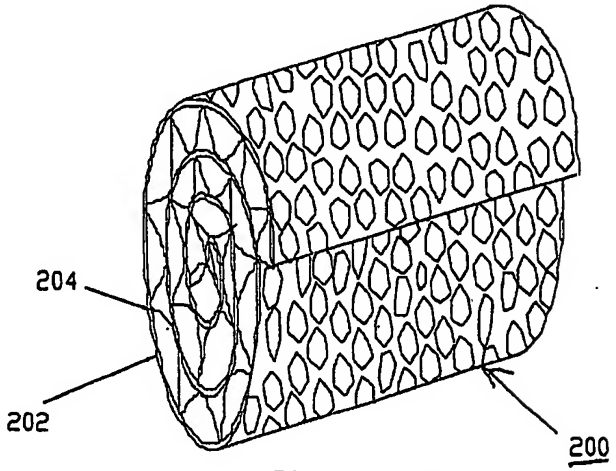

FIG. 13

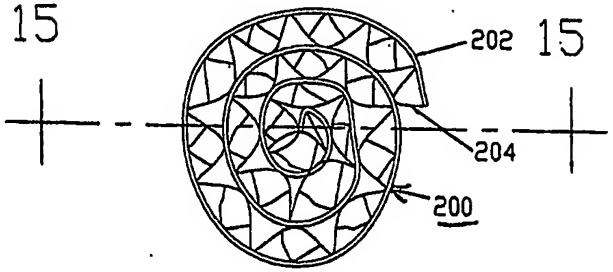

FIG. 14

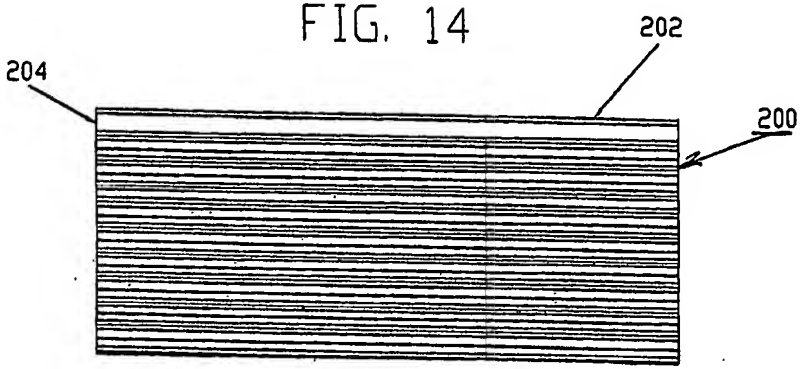

FIG. 15

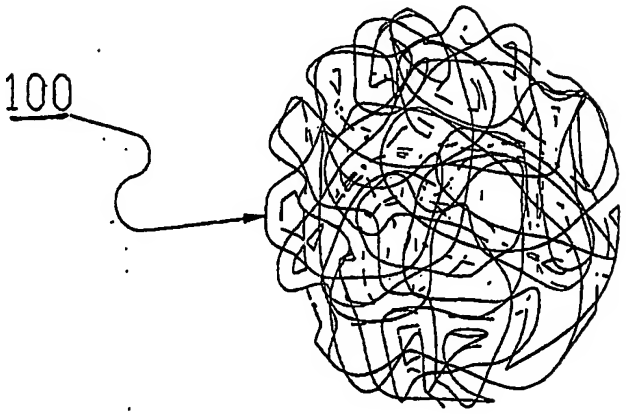

FIG. 16

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.
As rescanning documents *will not* correct images problems checked, please do not report the problems to the IFW Image Problem Mailbox